


W31 MARINER

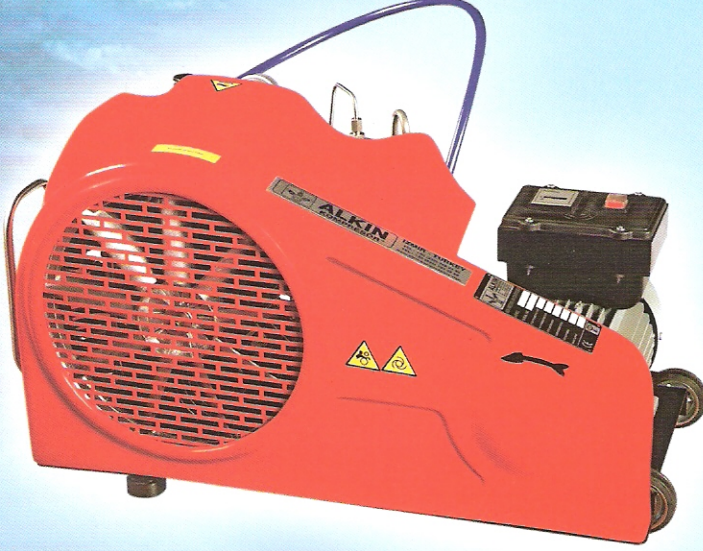

Standard Features

- P21 Purifier with Refillable Purifier Element
- 2 nd and 3rd stages Water Separator
- Intercoolers (Stainless Steel)
- Aftercooler (Stainless Steel)
- Priority Valve (Pressure Maintaining Valve)
- 1 Filling Hose (Yoke, Filling Valve, Pressure Gauge, DIN Adapter)
- Portable
- Manual Drain
- Air Quality comply with EN 12021

Optional Equipment


- Automatic Start / Stop
- Auto Drain
- Diesel Engine
- Extra Filling Hoses

Standart İçerik

- P21 Purifier ve Doldurulabilir Kartuşu
- 2. ve 3. Kademe Su Ayırıcı
- Ara Soğutucu Borular (Paslanmaz)
- Art Soğutucu Borular (Paslanmaz)
- Priority Valf
- 1 Adet Dolum Hortumu Komple (Yoke, Kollu Vana, Manometre, Din Adaptörü)
- Kolay Taşınabilir Şase
- Manuel Tahliye
- EN 12021 Standardına Uygun Hava Kalitesi

Opsiyonel Ekipmanlar

- Otomatik Start - Stop İçin Basınç Otomatığı
- Otomatik Tahliye
- Diesel Motor
- Ekstra Dolum Hortumu

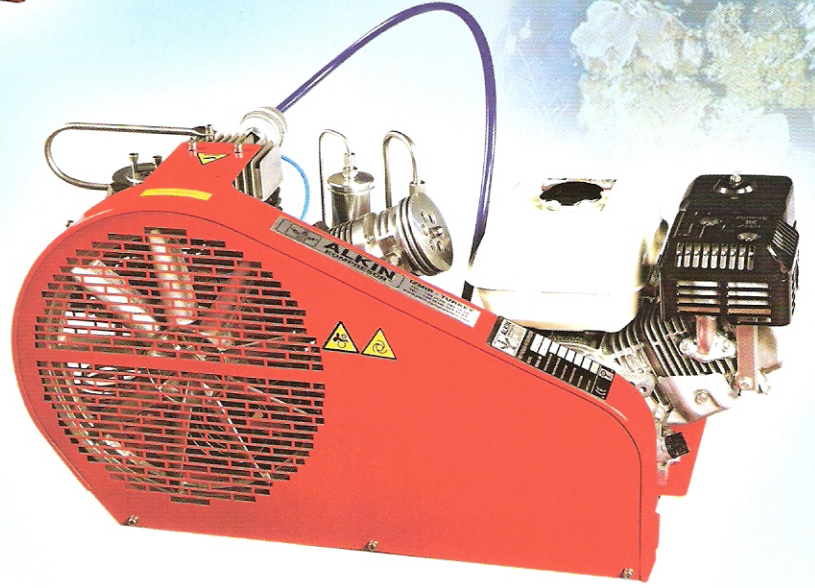

- Scuba Diving
- Fire Brigades
- Military Applications
- Naval Applications

- Scuba Dalış
- İtfaiye Birimleri
- Askeriye Birimleri
- Tersaneler

Performance & General Data / Performans ve Genel Bilgiler

ALKIN Model	Working Pressure Çalışma Basıncı		FAD Serbest Hava Debisi		*Charging Rate(min.) *Dolum Süresi	Motor Power Motor Gücü		RPM	No. of Stages Kademe Sayısı	No. of Cylinders Silindir Sayısı	Weight Ağırlık		Dimensions (cm.) Boyutları		
	Bar	Psi	Lt/min	Cfm		HP	KW				kg	Lbs	Width En	Length Boy	Height Yükseklik
W31	225	3260	100	3,5	2 dk	3	2,2	1200	3	3	58	127	89	40	48
	225	3260	100	3,5	2 dk	5,5 HP Petrol	4	1200	3	3	63	138	92	37	46
	310	4500	100	3,5	2 dk	3	2,2	1200	3	3	58	127	89	40	48
	310	4500	100	3,5	2 dk	5,5 HP Petrol	4	1200	3	3	63	138	92	37	46

Higher pressure models upto 350 Bar are available.

*Filling time for 1 lt. cylinder from 0 to 200 Bar.

350 bar çalışma basıncına kadar modellerimiz mevcuttur.

*1 Litrelik Tüpü 200 Bar'da Doldurma Süresi